SQM CONNECTOR Squib connectors



This connector for air-bag has intelligent CPA, which allows locking the connector, incomplete mating detection and release of short-circuit at the same time.

Features

Compact design

This connector is approximately 13mm smaller than the SQS connector in total length (31.3mm→18mm).

Intelligent CPA adopted. It enables the connector to be locked securely and prevents incomplete mating on the assembly line resulting in improved connector retention force.

Terminal construction


It is designed to prevent the deformation of the contact part when processing wire harness by protecting the contact part of each terminal with a box.

Scooping (kojiri) preventive construction

Using a shunt ring with a countermeasure for scooping (kojiri), the resistance to scooping (kojiri) insertion and withdrawal is improved.

Noise suppression


Ferrite core provides simple and reliable noise suppression characteristics.

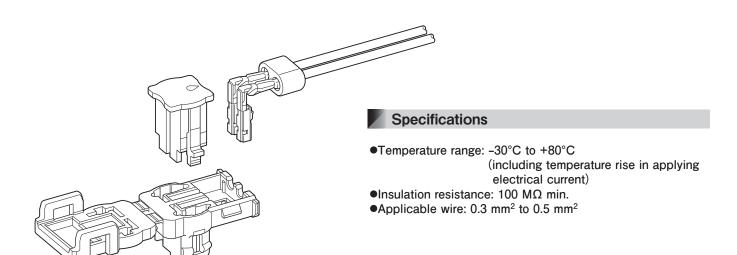

- * Compliant with ELV/RoHS.
- * Contact JST for details.

SQM CONNECTOR

Female terminal

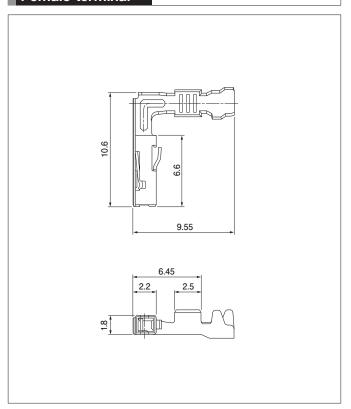

	Applicable		
Model No.	Conductor (mm²)	Insulation O.D. (mm)	Q'ty/reel
SQS-A03GF-P-P	0.3 to 0.5	1.0 to 1.6	6,500
SQS-A03GI-P-P	0.3 to 0.5	1.0 to 1.6	6,500


Material and Finish

GF: Copper alloy, nickel-undercoated, Contact area; gold-plated (0.4 mm min.)

GI: Copper alloy, nickel-undercoated,

Contact area; gold-plated (0.8 mm min.)

Female housing

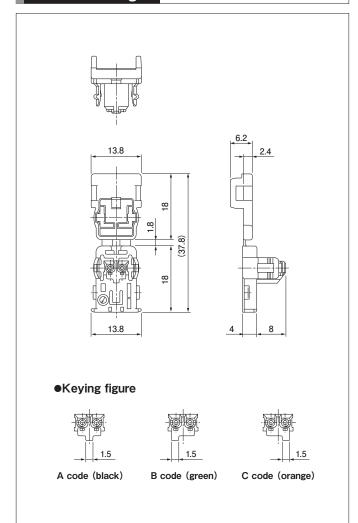


Circuits	Model No.	Key figure	Q'ty/box	Color
2	SQMR-02H-1A-K	A code	1,500	Black
	SQMR-02H-1B-M	B code	1,500	Green
	SQMR-02H-1C-D	C code	1,500	Orange

·		
Mat	erial	
DI	эт	
PI)	


SQM CONNECTOR

CPA housing

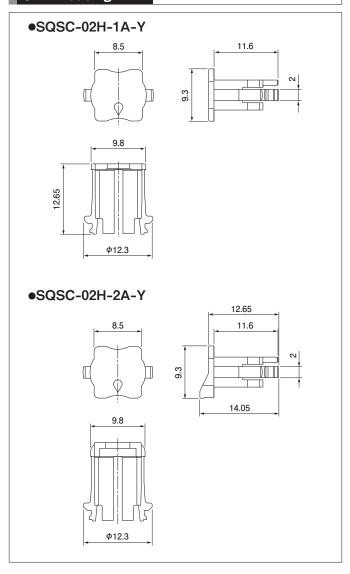

Circuits	Model No.	Q'ty/box	Color	
2	SQSC-02H-1A-Y	2,000	Yellow	
2	SQSC-02H-2A-Y	2,000	Yellow	
Material				
Glass-filled PBT				

Ferrite

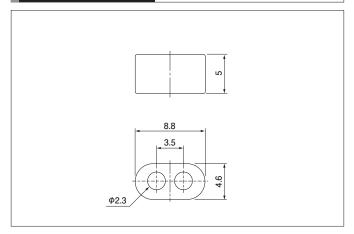

Circuits	Model No.	Q'ty/box
2	SQMF-02-1A	3,000

Crimping machine, Applicator

Strip terminal	Crimping machine	Crimp applicator MKS-L		
		Dies	Crimp applicator with dies	
SQS-A03GF-P-P	AP-K2N	MK/SQS-A03-P	APLMK SQS-A03-P	
SQS-A03GI-P-P		MK/5Q5-A03-P	APLINK SQS-AU3-P	

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.